

## Metering pumps

Applicable to the many diverse needs  
of chemical feeding



Iwaki's systematic LK series metering pump consists of the worm gear type dual-cam driving section, which is compact yet rigid and reliable, and wet-end materials of which there are seven types for various applications.



# Applicable to the many diverse needs of chemical feeding

Iwaki's systematic LK series metering pump consists of the worm gear type dual-cam driving section, which is compact yet rigid and reliable, and wet-end materials of which there are seven types for various applications.

With long and market-proven experience, Iwaki has employed state-of-the-art pump technologies in the development of an ideal type of chemical feeding pump which has advantages such as quality, performance, ease of operation and cost efficiency.

The LK series is suitable for many chemical liquid feeding processes used in a wide range of fields, including water treatment, chemicals, fabrics, paper mill, food processing, and medicine.





**Various types and materials**

Nine types (IWAKI original motor) and eight general purpose motor types are available to suit each user's needs in accordance with feeding rate from small to large capacity. Also, material variation has been improved. Selection of the pump material most suitable for the applied liquid is possible with seven different types available.

**High performance and application-oriented versatile design**

Discharge accuracy (stability) is within  $\pm 2\%$  FS. Reliability is considerably enhanced through efforts to improve the linearity of the stroke / discharge ratio as well as the dispersion between stroke.

Three types of joints flange, hose and union joints are standardized for the connections. The optimum piping system can be selected. (Only with 0.2kW IWAKI original motor type)



LK-B75S4




LK-B65VC



LK-C86VC

## Construction

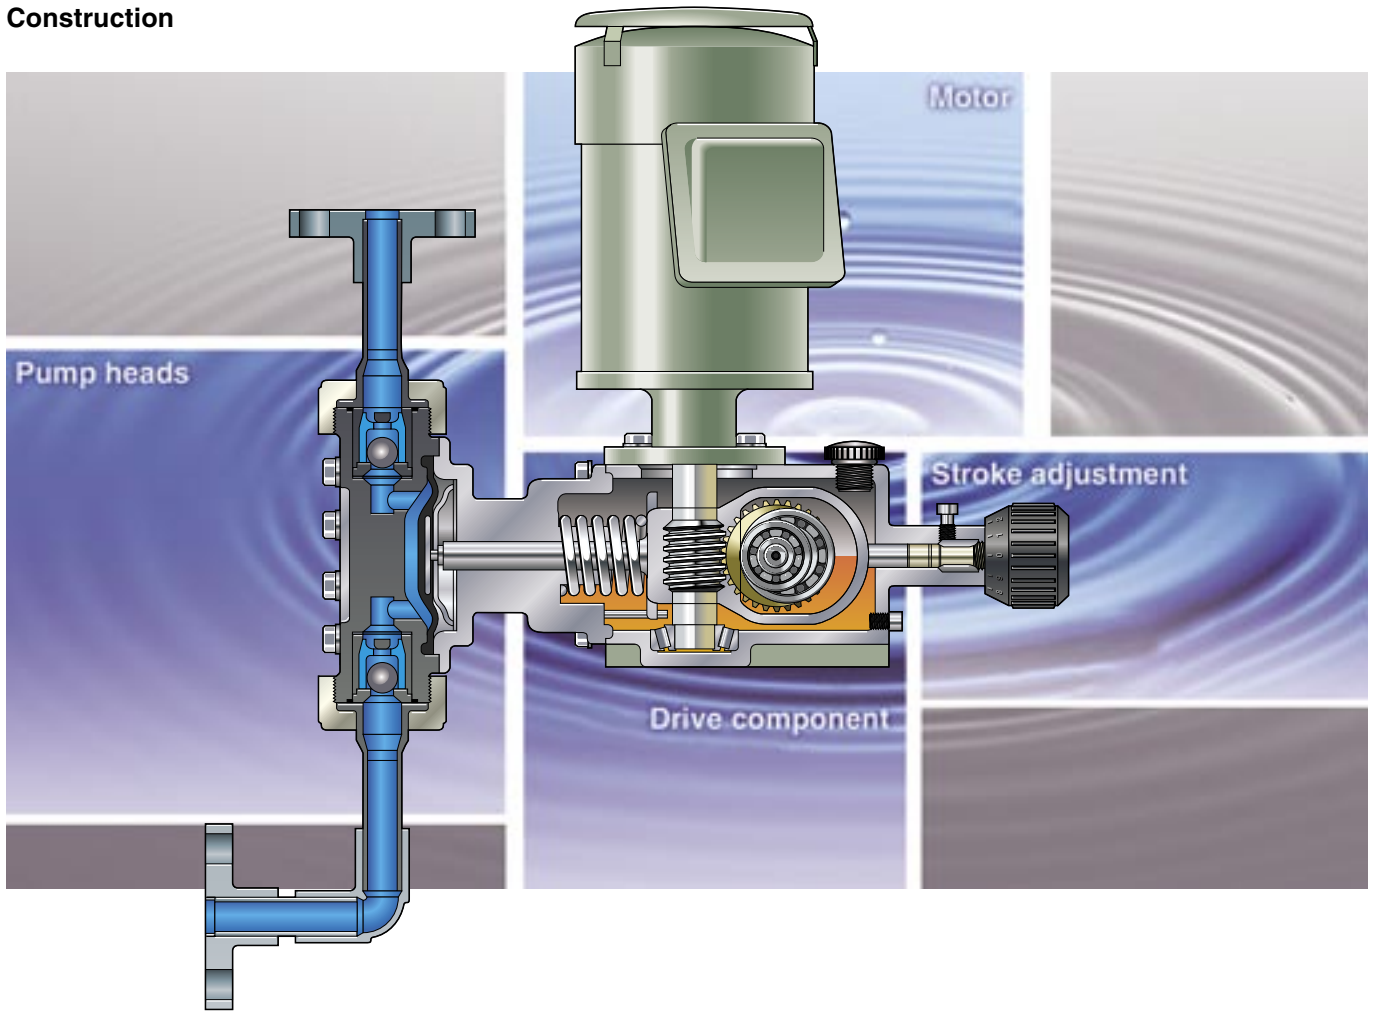

### Pump heads

Drive from the gear reduction unit is directly transmitted to the diaphragm. This type of metering pump is economical and simple with a high degree of versatility. With the employment of moulded PVC pump-head, and with the new standardisation of three types of connections using flanges, hose, or union joints (0.2kW type), not only a saving in parts cost but also improved flexibility of installation has been realized. The three main pump head materials are PVC, stainless steel, or fluororesin. The most suitable type for the application can be selected from a total of seven different materials. A wide range of chemicals, such as acid, alkaline, organic solvent, slurry, and high-temperature liquids, is covered by the series.

• Please contact us for Model PVDF.

### Drive component

The head of the LK series is the dual-cam system driving section with a highly reliable, built-in worm gear type speed reducer. The compact and rigid mechanism is a result of the design goal to achieve maximum wear resistance in continuous operation. In addition to the worm gear which is designed with a considerably large module ratio, the material is aluminium bronze, and a taper roller bearing is used at the end of the worm gear for the efficient transmission of motor power to the pump section. A fully enclosed oil bath lubrication system is employed to permit outdoor installation. The durability in continuous operation over a long period of time is also excellent.



### Motor


All of the standard models employ totally enclosed outdoor-use motors which are vertically mounted to save space. The 0.2kW type is an IWAKI original motor, which is installed in the small models of the LK series. Besides the standard 200V, other voltages are available. The LK series pumps of LK-F, LK-A, LK-B, and LK-C can be installed with general-purpose motors, including those for different voltage levels and explosion-proof specifications. Body configurations of the LK series are available in five types. They are an IWAKI original motor type frame and the general-purpose motor type frames, F, A, B and C.

### Stroke adjustment

Accurate and reliable stroke setting is possible with the micrometer type dial of the springback type stroke adjustment mechanism. An electric servo unit for automatic process control, such as flow, pressure, pH, temperature, and concentration can be arranged according to the user's needs.

### Electric servo system Specifications

- **Input signal :** DC4 - 20mA (or 1 - 5V)
- **Power source :** AC100V 50/60Hz; other voltage types available  
Voltage fluctuation 10%
- **Motor output :**  
LK (0.2kW) 15W  
LK-A, B, C 40W

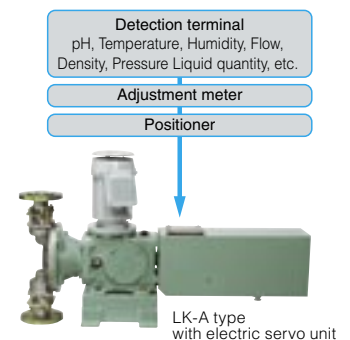

## Specifications

| Model  | Capacity L/min |       | Max. Pressure MPa |     | Stroke speed spm |      | Effective diaphragm dia. mm | Max. stroke length mm | Connection         |            |               | Motor output kW                                      | Approx net weight kg |     |     |            |      |     |    |
|--------|----------------|-------|-------------------|-----|------------------|------|-----------------------------|-----------------------|--------------------|------------|---------------|--|----------------------|-----|-----|------------|------|-----|----|
|        | Note 1         |       | Note 2            |     | 50Hz             | 60Hz |                             |                       | Flange (JIS10K) mm | Union      | Hose mm       |  | Note 5               |     |     |            |      |     |    |
|        | 50Hz           | 60Hz  | PVC               | SUS |                  |      |                             |                       |                    |            |               |  | PVC                  | SUS |     |            |      |     |    |
| LK-11  | 0.020          | 0.024 | 1.0               | 1.5 | 48               | 58   | ø22                         | 1.5                   | 15A (PVC)          | VP16 (PVC) | ø4 x ø9 (PVC) | 0.2<br>(Three phase)<br>or<br>0.25<br>(Single phase) | 12                   | 14  |     |            |      |     |    |
| 21     | 0.050          | 0.060 |                   |     |                  |      |                             |                       |                    |            |               |  |                      |     | 96  | 116        | ø30  | 2.0 |    |
| 22     | 0.10           | 0.12  |                   |     | 48               | 58   | ø60                         | 2.5                   |                    |            |               |  |                      |     |     |            |      |     |    |
| 31     | 0.25           | 0.30  |                   |     |                  |      |                             |                       |                    |            |               |  | 96                   | 116 | ø72 | 6.0        |      |     |    |
| 32     | 0.50           | 0.60  |                   |     | 48               | 58   | ø100                        | 10                    |                    |            |               |  |                      |     |     |            |      |     |    |
| 45     | 0.85           | 1.00  |                   |     |                  |      |                             |                       |                    |            |               |  | 96                   | 116 | 25A | VP25 (PVC) | -    | 16  | 26 |
| 47     | 1.7            | 2.0   |                   |     | 0.8              | 96   | 116                         | ø100                  |                    |            |               |  |                      |     |     |            |      |     |    |
| 55     | 2.8            | 3.3   |                   |     |                  |      |                             |                       |                    |            |               |  | 0.5                  | 48  | 58  | ø138       | 17.5 | 40A | -  |
| 57     | 6.0            | 7.2   |                   |     | 0.3              | 96   | 116                         | ø138                  |                    |            |               |  |                      |     |     |            |      |     |    |
| LK-A55 | 2.8            | 3.3   |                   |     |                  |      |                             |                       |                    |            |               |  | 1.0                  | 48  | 58  | ø150       | 20   | 50A | -  |
| A57    | 6.0            | 7.2   | 0.7               | 96  | 116              | ø150 | 20                          | 50A                   | -                  | -          | 1.5           | 140  |                      |     |     |            |      |     |    |
| A65    | 9.0            | 10.8  |                   |     |                  |      |                             |                       |                    |            |               |  | 0.3                  | 48  | 58  | ø205       | 20   | 65A | -  |
| B65    | 9.0            | 10.8  | 0.5               | 0.7 | 48               | 58   | ø138                        | 17.5                  | 40A                | -          | -             | 0.75   |                      |     |     |            |      |     |    |
| B75    | 13.3           | 16.0  |                   |     |                  |      |                             |                       |                    |            |               |  | 0.5                  | 72  | 86  | ø150       | 20   | 50A | -  |
| C76    | 20             | 24    | 0.5               | 96  | 116              | ø205 | 20                          | 65A                   | -                  | -          | 1.5           | 140  |                      |     |     |            |      |     |    |
| C86    | 33             | 40    |                   |     |                  |      |                             |                       |                    |            |               |  | 0.3                  | 96  | 116 | ø205       | 20   | 65A | -  |
| C87    | 45             | 54    | 0.3               | 96  | 116              | ø205 | 20                          | 65A                   | -                  | -          | 1.5           | 140  |                      |     |     |            |      |     |    |

Note 1: The capacity is the value when maximum discharge pressure is applied (with pure water at room temperature). The value may be larger than indicated in the table if the discharge pressure is lower. As for the liquid conditions pumped and performance, refer to the technical information of this catalogue.

Note 2: The maximum discharge pressure of LK-A models are restricted to 0.7MPa for A55, 0.5MPa for A57 and 0.2MPa for A65 when IEC standard 0.37kW motor is adopted.

Note 3: VS type connection is different in some models from standard.

Note 4: The LK type is equipped with Iwaki original flange motor. The standard is 200V 3-phase, totally enclosed fan-cooled outdoor type.

Other motors for different voltages, explosion-proof motors, or single-phase motors are available.

LK-F, LK-A, B and C are to be installed with general purpose flange motors.

Note 5: The weight is the value when installed with a totally enclosed fan-cooled outdoor motor.

• Standard accessory : A siphon preventing valve, strainer and 4m PVC tube are furnished to hose connection type of simplex LK-11 to LK-45 VH or VC A base is furnished to all LK-A, LK-B and LK-C models.


For LK-(F) 11 to LK-(F) 57 models, the base may be supplied optionally.

• Coating color : C37-60D (JPMA) (However, the motors for LK-F/A/B/C use the maker's standard color.)


• Duplex type : LK-11 to 47 type include duplex types with a special-use integrated drive section.

## Materials

LK-11 to LK-57  
(Flange type)

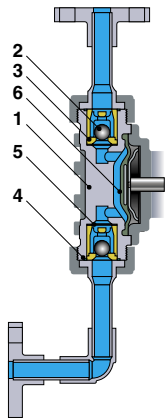

LK-A55 to LK-C87  
(Flange type)

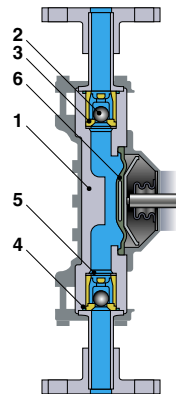

| Type  | VC          | VH        | VS4   | VS                   | S6        | S4         |
|---|-------------|-----------|---|----------------------|-----------|------------|
| Application   | Acids       | Alkalines |   | Viscosity and Slurry | Solvents  |            |
| Applicable type   | 11 to 87    | 11 to A57 | A65 to C87                                  | 11 to C87            | 11 to A57 | A65 to C87 |
| 1: Pump head  | PVC         |           |   |                      | SUS316    | SCS13      |
| 2: Valve ball   | CE          | HC        | SUS304                                      | HC / SUS304          | HC        | SUS304     |
| 3: Valve seat   | FKM         | EPDM      | PVC   | SUS304               | SUS316    | SUS304     |
| 4: O ring   | FKM         | EPDM      |   | SUS304               | SUS316    | SUS304     |
| 5: Valve gasket   | PTFE        |           |   |                      | PTFE      |            |
| 6: Diaphragm  | PTFE + EPDM |           |   |                      |           |            |
| <b>Typical chemical</b>   |             |           | <b>Material symbols</b>                     |                      |           |            |
| VC: Sulfuric acid, Hydrochloric acid, Sodium hypochlorite         |             |           | SCS13: Stainless-steel equivalent to SUS304 |                      |           |            |
| VH, VS4: Caustic soda, Coagulant, Calcium hydroxide (low density) |             |           | CE: Ceramic                                 |                      |           |            |
| VS: Calcium hydroxide, Highmolecular coagulant                    |             |           | FKM: Fluoro rubber                          |                      |           |            |
| S6, S4: Organic solvent, Paper making chemicals                   |             |           | EPDM: Ethylene propylene rubber             |                      |           |            |
|   |             |           | HC: Hastelloy C276                          |                      |           |            |

• Materials of the VS type valve balls are HC for 11 to A57 type and SUS304 for B65 to C87 type.

• As for the connection, which is different in some models from standard.

• A stainless steel pump SE type for latex emulsion is available (LK-31 to 57 type).

• Material PVdF is also available. Please contact us for details.

## Pump identification

**2 LK - A 65 VC H - 04 F E S**

- Simplex / Duplex**  
LK (IWAKI original motor type)  
None: Simplex  
2: Duplex (special drive section:LK-11 to 47)  
LK-F/A/B/C (JEM or IEC motor type)  
None: Simplex
- Series name**  
L series : Mechanical driven diaphragm type
- Drive section**  
LK (IWAKI original motor type)  
None : IWAKI original motor type 0.2kW / 0.25kW  
LK-F/A/B/C (JEM or IEC motor type)  
F: 0.25 or 0.37 kW (for IEC), 0.4kW  
A: 0.4kW  
B: 0.75kW  
C: 1.5kW
- Type No.**  
First digit : Diaphragm (pump head size)  
Second digit : Speed-reducing gear ratio 1•5 : 1/30, 2•7 : 1/15, 6 : 1/20
- Motor output**  
LK (IWAKI original motor type)  
02: 0.2kW, 03: 0.25kW (single phase)  
LK-F/A/B/C (JEM or IEC motor type)  
04: 0.4kW, 07: 0.75kW, 15: 1.5kW
- Material symbol**  
Refer to the material table  
(Ex. VC, VH, VS4, VS, S6, S4)
- Special symbol**  
S: Special specification other than standard.
- Servo unit**  
E: With electric servo unit
- Special motor**  
LK-F/A/B/C (JEM or IEC motor type)  
F: Inverter motor  
(Note : General-purpose motors have no explosion-proof symbol.)
- Joint**  
None : Flange  
U: union (LK-11 to LK-57)  
H: hose (LK-11 to LK-47)

• This table does not introduce the standard combination. Please contact us for details.  
• In case of pump without motor installation, the above item 7 and 8 are not indicated.

# Points to be observed in pump installation and piping

Iwaki metering pump LK series are reciprocating pumps employing the eccentric cam system.

Reciprocating pumps generate pulsation in the suction and discharge piping. Special consideration, (different from the ordinary centrifugal pumps), should be given to this point when planning the pump installation and piping.

## • Prevention of pipe vibration

**Discharge side inertial resistance  $P_{id} < 0.1\text{MPa}$**   
 •  $P_{id}$  : Inertial resistance on discharge side

Inertial resistance means the pulsated impact force generated by the flow just upon entering discharge stroke. It is a phenomenon particular to a reciprocating pump which is generated as a result of the sudden application of acceleration to the liquid in the discharge piping.  
 The condition  $*P_{id} < 0.1\text{MPa}$  is given above as an approximate standard. If  $P_{id}$  becomes 0.1MPa or higher, vibration on the pipe is generated. So measures should be taken to cope with the influence of vibration on the pump, too.

### Measures

1. Install pulsation prevention device (air chamber).
2. Enlarge the diameter and shorten the length of the discharge piping.

## • Prevention of overfeeding

**Pump differential pressure > Inertial resistance  $P_i$**   
 • The larger one of the suction side or the discharge side

Overfeeding means excessive flow of the liquid due to abnormal functioning of the check valve caused by pulsation of the liquid in the piping. Check carefully in case the differential pressure is low and in case the piping is too long even with the differential pressure value at 0.03MPa.

### Measures

1. Install air chamber.
2. Install back pressure valve

## • Prevention of suction failure

**$NPSH_a > NPSH_r$**   
 **$NPSH_a = P_a - P_v \pm P_{hs} - P_{is} \cdot MPa$**   
 \*Or  $P_{hs}$  : whichever is the larger.  
 (NPSH : Net positive suction head)

If  $NPSH_a$  is not sufficient, the pump may be damaged by the flow-break or cavitation generated under such conditions.

- $NPSH_a$  : Absolute NPSH (MPa)
- $NPSH_r$  : Required NPSH (value particular to the pump) (MPa)
- $P_a$  : Absolute pressure onto the tank liquid surface (MPa)
- $P_v$  : Liquid vapour pressure (MPa)
- $P_{hs}$  : Pressure caused by the height of the suction side (MPa) (Flooded suction : +, Negative suction : -)
- $P_{is}$  : Inertial resistance on the suction side (MPa)
- $P_{ts}$  : Piping resistance on the suction side (MPa)

## LK series performance

| Model | Viscosity<br>mPa·s |                    | Slurry(Calcium hydroxide)<br>wt% |      | NPSHr<br>MPaA | Inertial resistance<br>MPa/1m Note 1 |       | Applicable chambers<br>(0.3MPa) Note 2 |       |       |    |      |
|-------|--------------------|--------------------|----------------------------------|------|---------------|--------------------------------------|-------|--|-------|-------|----|------|
|       | PVC                | SUS                | PVC                              | SUS  |               | 50Hz                                 | 60Hz  | PVC                                    | SUS   |       |    |      |
| LK-   | 11                 | VC: 300<br>VH: 500 | 500                              | —    | 0.07          | 0.001                                | 0.001 | 1L                                     | 0.5L  |       |    |      |
|       | 21                 |                    |                                  |      |               |                                      |       |  |       |       |    |      |
|       | 22                 |                    |                                  |      |               |                                      |       |  |       |       |    |      |
|       | 31                 |                    | 1000                             | 15   |               |                                      |       | 0.08                                   | 0.003 | 0.004 | 2L | 1.5L |
|       | 32                 |                    |                                  |      |               |                                      |       |  |       |       |    |      |
|       | 45                 |                    |                                  |      |               |                                      |       |  |       |       |    |      |
|       | 47                 |                    |                                  |      |               |                                      |       |  |       |       |    |      |
| 55    | 500                | 1000               | 15                               | 0.08 | 0.003         | 0.004                                | 5L    | 5L                                     |       |       |    |      |
| 57    |                    |                    |                                  |      |               |                                      |       |  |       |       |    |      |
| 65    |                    |                    |                                  |      |               |                                      |       |  |       |       |    |      |
| LK-A  | 65                 | 500                | 1000                             | 15   | 0.08          | 0.004                                | 0.005 | 10L                                    | 10L   |       |    |      |
|       | 75                 |                    |                                  |      |               |                                      |       |  |       |       |    |      |
| LK-B  | 65                 | 500                | 1000                             | 15   | 0.08          | 0.004                                | 0.005 | 20L                                    | 20L   |       |    |      |
|       | 75                 |                    |                                  |      |               |                                      |       |  |       |       |    |      |
| LK-C  | 76                 | 500                | 1000                             | 15   | 0.08          | 0.007                                | 0.009 | 20L                                    | 20L   |       |    |      |
|       | 86                 |                    |                                  |      |               |                                      |       |  |       |       |    |      |
|       | 87                 |                    |                                  |      |               |                                      |       |  |       |       |    |      |

- Discharge capacity may reduce when sending viscous/slurry liquid. • Dosing flow fluctuation:  $\pm 2\%FS$  • Linearity deviation:  $\pm 3\%FS$
- Permissible liquid temperature PVC: 0 - 50°C, SUS: 0 - 80°C • Maximum suction lift: 1m at full stroke length • Permissible ambient temperature: 0 - 40°C • Paint color: C37-60D(JPMA)
- Note 1: Inertial resistance  $P_i$  is calculated per 1m on condition that the pipeline has the same bore as the pump (by pumping clean water at full stroke length). Determine the actual  $P_i$  by the following formula.  
 Inertial resistance  $P_{id}(P_{is}) = \text{Applicable } P_i \text{ on the table} \times \text{viscosity} \times \text{actual pipe length (m)} \dots \dots \dots (\text{MPa})$  ( $P_{id}$ : Discharge side  $P_i$ ,  $P_{is}$ : Suction side  $P_i$ )  
 If pipe bore is different from the pump bore: Inertial resistance  $P_{id}(P_{is}) = \text{Applicable } P_i \text{ on the table} \times \text{specific gravity} \times \text{actual pipe length} \times (\text{Pump bore} \div \text{pipe bore})^2 \dots \dots \dots (\text{MPa})$
- Note 2: Applicable chamber: Chamber volume is based on IWAKI's standard chambers.

## LK-VS type (Viscosity/slurry)

| Model   | Connection   |                            | Viscosity<br>mPa·s | Slurry<br>wt% | Materials  |   |
|---|--------------|----------------------------|--------------------|---------------|------------|---|
|   | flange       | hose                       |                    |               | valve seat | valve guide                             |
| LK-11VS<br>21VS<br>31VS<br>45VS<br>47VS<br>51VS | 15A          | * $\phi 12 \times \phi 18$ | 1000               | 15            | *SUS304    | *PVC<br>(For VS)<br><br>PVC<br>(Normal) |
|   |              | Normal                     |                    |               |            |   |
|   | *25A         | *Hose cannot be used       |                    |               |            |   |
|   | 25A (Normal) | —                          |                    |               |            |   |

| Model                      | Connection                            | Viscosity<br>mPa·s | Slurry<br>wt% | Materials  |                 |
|----------------------------|---------------------------------------|--------------------|---------------|------------|-----------------|
|                            |                                       |                    |               | valve seat | valve guide     |
| LK-A11VS<br>B11VS<br>C11VS | See the standard<br>flange connection | 1000               | 5             | *SUS304    | PVC<br>(Normal) |

- The information marked with \* are for the VS type only.
- Suction-side piping should be flooded suction system.

## Inverter control of LK series

In case of inverter-applied control of the discharge, the control range may be different according to the types or the pressure employed.

### List of the specifications for the selection of LK series inverter control system

| Model | Capacity<br>Full stroke length<br>L/min Note 1 | Max. Pressure<br>MPa |     | Control range<br>Note 2 | Stroke speed<br>spm | Inverter<br>frequency<br>Hz | Motor<br>Note 3   | Description  |
|-------|--|----------------------|-----|-------------------------|---------------------|-----------------------------|---|--|
|       |  | PVC, PVDF            | SUS |                         |                     |                             |   |  |
| LK-   | 11   | 0.008 - 0.032        | 1.0 | 1.5                     | 1 : 4               | 19 - 78                     | 0.2kW<br>Standard motor<br>(IWAKI original<br>flange motor) | 1. The frequency less than the lowest in the table cannot be used as unstable rotation of motor is expected.<br>2. Drive over the max. frequency cannot be made.<br>3. Inverter motor cannot be installed. |
|       | 21   | 0.02 - 0.08          | 1.0 | 1.5                     | 1 : 4               | 19 - 78                     |   |  |
|       | 22   | 0.04 - 0.12          | 1.0 | 1.5                     | 1 : 3               | 38 - 116                    |   |  |
|       | 31   | 0.10 - 0.40          | 1.0 | 1.5                     | 1 : 4               | 19 - 78                     |   |  |
|       | 32   | 0.20 - 0.60          | 1.0 | 1.5                     | 1 : 3               | 38 - 116                    |   |  |
|       | 45   | 0.33 - 1.3           | 0.8 | 0.8                     | 1 : 4               | 19 - 78                     |   |  |
|       | 47   | 0.66 - 2.0           | 0.8 | 0.8                     | 1 : 3               | 38 - 116                    |   |  |
| LK-F  | 55   | 1.37 - 4.4           | 0.3 | 0.3                     | 1 : 3.2             | 24 - 78                     | 0.4kW<br>Inverter motor<br>(VF motor)                       | 1. The frequency less than the lowest should not cause trouble in operation. However, such a level may affect the stability of the pump's performance.   |
|       | 57   | 3.6 - 7.2            | 0.3 | 0.3                     | 1 : 2               | 58 - 116                    |   |  |
|       | 11   | 0.005 - 0.024        | 1.0 | 1.5                     | 1 : 5               | 11 - 58                     |   |  |
|       | 21   | 0.012 - 0.06         | 1.0 | 1.5                     | 1 : 5               | 11 - 58                     |   |  |
|       | 22   | 0.02 - 0.12          | 1.0 | 1.5                     | 1 : 6               | 19 - 116                    |   |  |
|       | 31   | 0.06 - 0.30          | 1.0 | 1.5                     | 1 : 5               | 11 - 58                     |   |  |
|       | 32   | 0.10 - 0.60          | 1.0 | 1.5                     | 1 : 6               | 19 - 116                    |   |  |
| LK-A  | 45   | 0.2 - 1.0            | 1.0 | 1.5                     | 1 : 5               | 11 - 58                     | 0.4kW<br>Inverter motor<br>(VF motor)                       | 1. The frequency less than the lowest cannot be used as unstable motor rotation of motor is expected.  |
|       | 47   | 0.33 - 2.0           | 0.8 | 0.8                     | 1 : 6               | 19 - 116                    |   |  |
|       | 55   | 0.66 - 3.3           | 0.5 | 0.5                     | 1 : 5               | 11 - 58                     |   |  |
|       | 57   | 1.2 - 7.2            | 0.3 | 0.3                     | 1 : 6               | 19 - 116                    |   |  |
|       | 55   | 1.1 - 4.4            | 0.3 | 0.3                     | 1 : 4               | 20 - 78                     |   |  |
| LK-B  | 55   | 1.4 - 4.4            | 0.5 | 0.5                     | 1 : 3.2             | 25 - 78                     | 0.4kW<br>Inverter motor<br>(VF motor)                       | 1. The frequency less than the lowest cannot be used as unstable motor rotation of motor is expected.  |
|       | 57   | 1.8 - 7.2            | 0.3 | 0.3                     | 1 : 4               | 29 - 116                    |   |  |
|       | 65   | 3.6 - 7.2            | 0.5 | 0.5                     | 1 : 2               | 58 - 116                    |   |  |
| LK-C  | 65   | 4.5 - 14.4           | 0.2 | 0.2                     | 1 : 3.2             | 25 - 78                     | 0.75kW<br>Inverter motor<br>(VF motor)                      | 2. Drive over the max. frequency cannot be used.   |
|       | 75   | 3.7 - 14.5           | 0.3 | 0.3                     | 1 : 4               | 20 - 78                     |   |  |
|       | 87   | 6.7 - 21.5           | 0.3 | 0.3                     | 1 : 3.2             | 24 - 78                     |   |  |
| LK-C  | 76   | 8 - 24               | 0.5 | 0.5                     | 1 : 3               | 28 - 86                     | 1.5kW<br>Inverter motor<br>(VF motor)                       | 2. Drive over the max. frequency cannot be used.   |
|       | 86   | 13 - 40              | 0.3 | 0.3                     | 1 : 3               | 28 - 86                     |   |  |
|       | 87   | 18 - 54              | 0.3 | 0.3                     | 1 : 3               | 38 - 116                    |   |  |


- Note 1: The capacity is the value when the maximum discharge pressure is applied in each type (with pure water at room temperature)
- Note 2: With the LK-F type, a larger control range than 1 : 10 is available. In this case, however, the discharge accuracy and the linearity may be affected due to a stroke speed as low as 15 spm.
- Note 3: The standard inverter is the Toshiba VF motor. In case of another motor used, most of the date in this list can still be used. To be sure, please contact your distributor in advance.  
 An inverter control with an ordinary general-purpose motor should not be employed, because it may result in trouble in the low speed range.
- This table is applied to 200V range inverter. Ask us for the inverter of other voltage.
- Two-value control by inverter and electric servo can not be done.

## Optional accessories

### Siphon preventing valve

| Model                                       |        | BVC-1P□L-□H     | BVC-1P□-□H   |
|---|--------|-----------------|--------------|
| Applicable capacity                         |        | Up to 1L/min    |              |
| Setting pressure                            |        | 0.05 - 0.3MPa   | 0.3 - 0.8MPa |
| Material                                    |        | PVC, FKM (EPDM) |              |
| Connection mm<br>(Applicable tube diameter) | Inlet  | 4 x 9, 12 x 18  |              |
|   | Outlet | PT3/8 and PT1/2 |              |

□: Symbol for material of O-ring ("V" for FKM, "E" for EPDM)



### Air chamber

| Body   | Model           | Applicable capacity L | Setting pressure MPa | Connection Nominal size JIS10K flange | Weight kg |
|--------|-----------------|-----------------------|----------------------|---------------------------------------|-----------|
| PVC    | A-1V□           | 1.0                   | 0.5                  | Common for 15A - 25A                  | 2         |
|        | A-2V□           | 2.0                   |                      |                                       | 2.5       |
|        | A-5V□           | 5.0                   |                      |                                       | 4.5       |
|        | N40A-10V(2)-F * | 10                    |                      |                                       | 16        |
|        | N50A-20V(2)-F * | 20                    |                      |                                       | 26        |
|        | N65A-30V(2)-F * | 30                    |                      |                                       | 49        |
| SUS316 | A-05S6-( )      | 0.5                   | 0.9                  | 10, 15, 20A                           | 3         |
|        | A-1S6-( )       | 1.5                   |                      | 15, 20, 25A                           | 5         |
|        | A-5S6-( )       | 5.0                   |                      | 25, 40A                               | 12        |
|        | A-10S6-( )      | 10                    |                      | 40, 50A                               | 15        |
|        | A-20S6-( )      | 20                    |                      | 50, 65A                               | 29        |
|        | A-36S6-( )      | 36                    |                      | 65A                                   | 55        |

\* : Material for O-ring 10V / 20V for CR, 10V2 / 20V2 for FKM

□: Symbol for material of O-ring ("V" for FKM, "E" for EPDM)

( ) : Symbol for connection (10, 15, 20, 25, 40, 50 or 65)

• The weight is the value of the product only. (The weight of liquid applied is not included.)

• Rigid PVC chamber may deteriorate with ultraviolet ray or the applied chemical liquid over a long period of time. The chamber should be replaced every three years to guarantee safety.



PVC, A type



PVC, N type




SUS, A type




SUS, A type

### Relief valve and back pressure valve



PVC type



SUS type

#### List of relief valve

| Body           | Model       | Max. capacity L/min | Setting pressure MPa | Connection Nominal size JIS10K flange | Weight kg |
|----------------|-------------|---------------------|----------------------|---------------------------------------|-----------|
| PVC            | RV-1P□-4H   | 1.0                 | 0.3 - 0.8            | ø4 x ø9 PVC Hose                      | 0.2       |
|                | RV-1P□-12H  | 1.0                 | 0.3 - 0.8            | ø12 x ø18 PVC Hose                    | 0.2       |
|                | RV-1P□-15   | 1.0                 | 0.3 - 0.8            | 15A                                   | 0.5       |
|                | RV-1P□-20   | 1.0                 | 0.3 - 0.8            | 20A                                   | 0.5       |
|                | RV-1P□B-15  | 1.0                 | 0.8 - 1.0            | 15A                                   | 0.5       |
|                | RV-3P-15    | 3.0                 | 0.3 - 1.0            | 15A                                   | 0.6       |
|                | RV-3P-20    | 3.0                 | 0.3 - 1.0            | 20A                                   | 0.6       |
|                | RV-3P-25    | 3.0                 | 0.3 - 1.0            | 25A                                   | 0.9       |
|                | RV-3P□-12H  | 3.0                 | 0.3 - 1.0            | ø12 x ø18 PVC Hose                    | 0.4       |
|                | RV-3P□-12P  | 3.0                 | 0.3 - 1.0            | ø12 x ø16 PE Hose                     | 0.4       |
|                | RV-3P□-13E  | 3.0                 | 0.3 - 1.0            | ø13 x ø20 PE Hose                     | 0.4       |
|                | RV-7V-20    | 7.5                 | 0.3 - 0.8            | 20A                                   | 3         |
|                | RV-7V-25    | 7.5                 | 0.3 - 0.8            | 25A                                   | 3.5       |
|                | RV-7VB-20   | 7.5                 | 0.8 - 1.0            | 20A                                   | 3         |
|                | RV-7VB-25   | 7.5                 | 0.8 - 1.0            | 25A                                   | 3.5       |
|                | RV-25V-25   | 25                  | 0.3 - 0.8            | 25A                                   | 4         |
|                | RV-25V-40   | 25                  | 0.3 - 0.8            | 40A                                   | 4         |
|                | RV-25V-50   | 25                  | 0.3 - 0.8            | 50A                                   | 5         |
|                | N50RV-5V-F  | 50                  | 0.15 - 0.5           | 50A                                   | 18        |
|                | N50RV-5V2-F | 50                  | 0.15 - 0.5           | 50A                                   | 18        |
| N65*50RV-5V-F  | 70          | 0.15 - 0.5          | 65A                  | 18                                    |           |
| N65*50RV-5V2-F | 70          | 0.15 - 0.5          | 65A                  | 18                                    |           |
| SUS            | RV-2S6-15   | 2.0                 | 0.3 - 0.8            | 15A                                   | 3.5       |
|                | RV-2S6B-15  | 2.0                 | 0.8 - 1.5            | 15A                                   | 3.5       |
|                | RV-7S6-25   | 7.5                 | 0.3 - 0.8            | 25A                                   | 6         |
|                | RV-7S6B-25  | 7.5                 | 0.8 - 1.5            | 25A                                   | 6         |
|                | RV-25S6-25  | 25                  | 0.3 - 0.8            | 25A                                   | 7.5       |
|                | RV-25S6B-25 | 25                  | 0.8 - 1.0            | 25A                                   | 7.5       |
|                | RV-25S6-40  | 25                  | 0.3 - 0.8            | 40A                                   | 7.5       |
|                | RV-25S6-50  | 25                  | 0.3 - 0.8            | 50A                                   | 10        |
|                | RV-25S6B-40 | 25                  | 0.8 - 1.0            | 40A                                   | 7.5       |
|                | N50RV-5S6-F | 80                  | 0.15 - 0.5           | 50A                                   | 29        |
| N65RV-5S6-F    | 120         | 0.15 - 0.5          | 65A                  | 42                                    |           |

□: Symbol for material of O-ring ("V" for FKM, "E" for EPDM)

O-ring material of N type is "5V2" for FKM.

• Material for diaphragm is PTFE except RV-1P and N type.

Material of diaphragm is same as O-ring material at RV-1P and N type.

#### List of back pressure valve

| Body           | Model       | Max. capacity L/min | Setting pressure MPa | Connection Noeminal size JIS10K flange | Weight kg |
|----------------|-------------|---------------------|----------------------|--|-----------|
| PVC            | BV-1P□-4H   | 0.005 - 1.0         | 0.3 - 0.8            | ø4 x ø9 PVC Hose                       | 0.2       |
|                | BV-1P□-12H  | 0.005 - 1.0         | 0.3 - 0.8            | ø12 x ø18 PVC Hose                     | 0.2       |
|                | BV-1P□-15   | 0.005 - 1.0         | 0.3 - 0.8            | 15A                                    | 0.5       |
|                | BV-1P□-20   | 0.005 - 1.0         | 0.3 - 0.8            | 20A                                    | 0.5       |
|                | BV-1P□L-4H  | 0.005 - 1.0         | 0.05 - 0.3           | ø4 x ø9 PVC Hose                       | 0.2       |
|                | BV-1P□L-12H | 0.005 - 1.0         | 0.05 - 0.3           | ø12 x ø18 PVC Hose                     | 0.2       |
|                | BV-1P□L-15  | 0.005 - 1.0         | 0.05 - 0.3           | 15A                                    | 0.5       |
|                | BV-1P□L-20  | 0.005 - 1.0         | 0.05 - 0.3           | 20A                                    | 0.5       |
|                | BV-3P□-12H  | 0.03 - 1.0          | 0.1 - 0.8            | ø12 x ø18 PVC Hose                     | 0.4       |
|                | BV-3P□-12P  | 0.03 - 1.0          | 0.1 - 0.8            | ø12 x ø16 PE Hose                      | 0.4       |
|                | BV-3P□-13E  | 0.03 - 1.0          | 0.1 - 0.8            | ø13 x ø20 PE Hose                      | 0.4       |
|                | BV-3N□-12H  | 0.03 - 3.0          | 0.1 - 0.3            | ø12 x ø18 PVC Hose                     | 0.4       |
|                | BV-3N□-15   | 0.03 - 3.0          | 0.1 - 0.3            | 15A                                    | 0.6       |
|                | BV-3N□-20   | 0.03 - 3.0          | 0.1 - 0.3            | 20A                                    | 0.6       |
|                | BV-3N□-25   | 0.03 - 3.0          | 0.1 - 0.3            | 25A                                    | 0.9       |
|                | BV-7V-20    | 0.2 - 7.5           | 0.05 - 0.8           | 20A                                    | 3         |
|                | BV-7V-25    | 0.2 - 7.5           | 0.05 - 0.8           | 25A                                    | 3.5       |
|                | BV-25V-25   | 2 - 25              | 0.1 - 0.8            | 25A                                    | 4         |
|                | BV-25V-40   | 2 - 25              | 0.1 - 0.8            | 40A                                    | 4         |
|                | BV-25V-50   | 2 - 25              | 0.1 - 0.8            | 50A                                    | 5         |
| N50BV-5V-F     | 2.5 - 50    | 0.15 - 0.5          | 50A                  | 18                                     |           |
| N50BV-5V2-F    | 2.5 - 50    | 0.15 - 0.5          | 50A                  | 18                                     |           |
| N65*50BV-5V-F  | 5 - 70      | 0.15 - 0.5          | 65A                  | 18                                     |           |
| N65*50BV-5V2-F | 5 - 70      | 0.15 - 0.5          | 65A                  | 18                                     |           |
| SUS            | BV-2S6-15   | 0.02 - 2.0          | 0.05 - 0.8           | 15A                                    | 3.5       |
|                | BV-7S6-25   | 0.2 - 7.5           | 0.15 - 0.5           | 25A                                    | 6         |
|                | BV-25S6-25  | 2 - 25              | 0.1 - 0.8            | 25A                                    | 7.5       |
|                | BV-25S6-40  | 2 - 25              | 0.1 - 0.8            | 40A                                    | 7.5       |
|                | BV-25S6-50  | 2 - 25              | 0.1 - 0.8            | 50A                                    | 10        |
|                | N50BV-5S6-F | 2.5 - 80            | 0.15 - 0.5           | 50A                                    | 29        |
| N65BV-5S6-F    | 5 - 120     | 0.15 - 0.5          | 65A                  | 42                                     |           |

□: Symbol for material of O-ring ("V" for FKM, "E" for EPDM)

O-ring material or N type is "5V" for CR, or "5V2" for FKM.

• Material for diaphragm is PTFE except BV-1P and N type.


Material of diaphragm is same as O-ring material at BV-1P and N type.

• The back pressure valve can not curb the residual flow completely when the pump stops. Use the solenoid valve in order to shut out the residual flow.

## Dimensions (in mm)

Dimensions may be changed without prior notice for the purpose of product improvement.  
Be sure to carry out installation work with the most recent and detailed drawings, which are available upon request


### LK-11 to LK-57 (Original motor type)

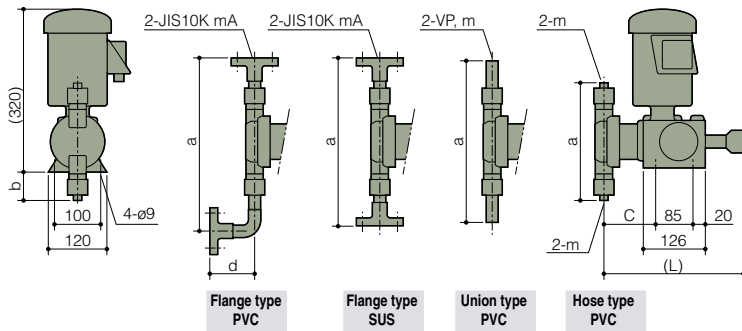

| Model | Hose type PVC |     |    |    |        | Union type PVC |     |     |    |     | Flange type PVC |     |     |    |    | Flange type SUS |     |     |     |     |    |   |  |  |  |  |  |
|-------|---------------|-----|----|----|--------|----------------|-----|-----|----|-----|-----------------|-----|-----|----|----|-----------------|-----|-----|-----|-----|----|---|--|--|--|--|--|
|       | L             | a   | b  | c  | m      | L              | a   | b   | c  | m   | L               | a   | b   | c  | d  | m               | L   | a   | b   | c   | d  | m |  |  |  |  |  |
| LK-1  | 274           | 146 | 23 | 95 |        | 274            | 240 | 70  | 95 | 16  | 274             | 264 | 86  | 95 | 89 | 15              | 272 | 141 | 20  | 92  | 15 |   |  |  |  |  |  |
| 2     | 274           | 164 | 32 | 95 |        | 274            | 258 | 79  | 95 | 16  | 274             | 282 | 95  | 95 | 89 | 15              | 272 | 151 | 25  | 92  | 15 |   |  |  |  |  |  |
| 3     | 277           | 224 | 62 | 97 | Note 1 | 277            | 318 | 109 | 97 | 16  | 277             | 342 | 117 | 97 | 89 | 15              | 277 | 184 | 42  | 97  | 15 |   |  |  |  |  |  |
| 4     | 281           | 244 | 62 | 99 |        | 281            | 338 | 119 | 99 | 16  | 281             | 362 | 135 | 99 | 89 | 15              | 283 | 261 | 80  | 101 | 15 |   |  |  |  |  |  |
| 5     | -             | -   | -  | -  | 298    | 314            | 107 | 114 | 25 | 298 | 338             | 125 | 114 | 97 | 25 | 295             | 320 | 109 | 111 | 25  |    |   |  |  |  |  |  |
| 47VS  | -             | -   | -  | -  | 291    | 272            | 86  | 99  | 25 | 281 | 308             | 104 | 99  | 97 | 25 | -               | -   | -   | -   | -   |    |   |  |  |  |  |  |

Note 1: Connection size LK-1 and LK-2 ø4mm x ø9mm, LK-3, LK-4 and LK-1 to LK-4 VS type ø12mm x ø18mm.  
For information of TC type, please contact IWAKI or nearest distributor.


### LK-A55 to LK-C87 (General purpose motor type)

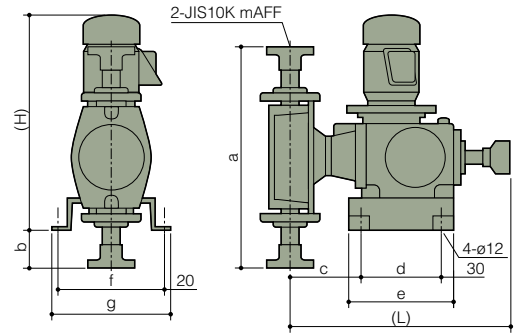

| Model | PVC |     |     |     |   | SUS |     |     |     |   | Note 2 |     |     |     |     |    |
|-------|-----|-----|-----|-----|---|-----|-----|-----|-----|---|--------|-----|-----|-----|-----|----|
|       | L   | a   | b   | c   | m | L   | a   | b   | c   | m | H      | d   | e   | f   | g   | m  |
| LK-A5 | 476 | 325 | -29 | 119 |   | 473 | 320 | -32 | 108 |   | 547    | 180 | 240 | 260 | 300 | 25 |
| A6    | 532 | 599 | 108 | 154 |   | 533 | 431 | 24  | 164 |   | 547    | 180 | 240 | 260 | 300 | 40 |
| B6    | 595 | 599 | 90  | 164 |   | 605 | 431 | 6   | 174 |   | 594    | 240 | 300 | 310 | 350 | 40 |
| B7    | 599 | 600 | 90  | 167 |   | 610 | 465 | 23  | 178 |   | 594    | 240 | 300 | 310 | 350 | 50 |
| C7    | 599 | 600 | 90  | 167 |   | 610 | 465 | 23  | 178 |   | 601    | 240 | 300 | 310 | 350 | 50 |
| C8    | 605 | 647 | 114 | 173 |   | 609 | 633 | 107 | 177 |   | 601    | 240 | 300 | 310 | 350 | 65 |

Note 2: These dimensions are common between PVC pump head and SUS pump head.

### LK-F1 to F5 (General purpose motor type)

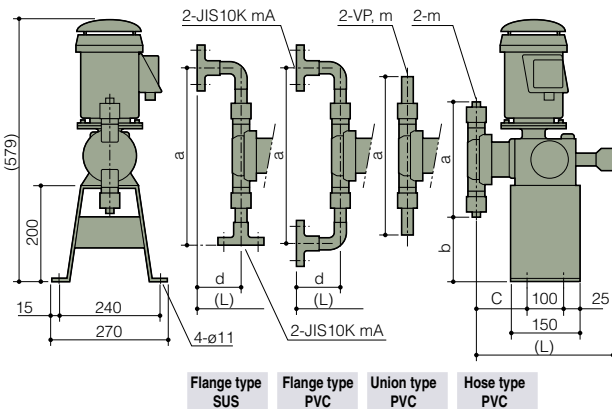


| Model | Hose type PVC |     |     |    |        | Union type PVC |     |     |     |    | Flange type PVC |     |     |     |    | Flange type SUS |     |     |     |     |     |    |
|-------|---------------|-----|-----|----|--------|----------------|-----|-----|-----|----|-----------------|-----|-----|-----|----|-----------------|-----|-----|-----|-----|-----|----|
|       | L             | a   | b   | c  | m      | L              | a   | b   | c   | m  | L               | a   | b   | c   | d  | m               | L   | a   | b   | c   | d   | m  |
| LK-F1 | 274           | 146 | 177 | 87 |        | 274            | 240 | 130 | 87  | 16 | 363             | 272 | 114 | 87  | 89 | 15              | 332 | 156 | 180 | 85  | 60  | 15 |
| 2     | 274           | 164 | 168 | 87 | Note 1 | 274            | 258 | 121 | 87  | 16 | 363             | 290 | 105 | 87  | 89 | 15              | 332 | 166 | 175 | 85  | 60  | 15 |
| 3     | 277           | 224 | 138 | 89 |        | 277            | 318 | 91  | 89  | 16 | 366             | 350 | 75  | 89  | 89 | 15              | 337 | 201 | 158 | 90  | 60  | 15 |
| 4     | 281           | 243 | 128 | 92 |        | 281            | 337 | 81  | 92  | 16 | 370             | 369 | 65  | 92  | 89 | 15              | 343 | 270 | 120 | 94  | 60  | 15 |
| 5     | -             | -   | -   | -  |        | 298            | 314 | 93  | 107 | 25 | 395             | 350 | 75  | 107 | 97 | 25              | 399 | 368 | 90  | 104 | 104 | 25 |
| 47VS  | -             | -   | -   | -  |        | 281            | 272 | 114 | 92  | 25 | 378             | 308 | 96  | 92  | 97 | 25              | -   | -   | -   | -   | -   | -  |

Note 1: Connection size LK-1 and LK-2 ø4mm x ø9mm, LK-3, LK-4 and LK-1 to LK-4 VS type ø12mm x ø18mm.  
For information of TC type, please contact IWAKI or nearest distributor.

## Pump controller MFC

### Multifunction pump controller for LK-F series metering pumps

- Capable of analogue input (4~20mA) and pulse input (Dividing/Multiply) operation
- Operating functions of the pump can be monitored via external output signal.
- Easy key touch operation and a large LCD display give good control legibility.
- Display preference of flow rate (L/min) or stroke rate (SPM) is user-selectable.
- Combination of stroke length adjustment with stroke rate enables flow volume control over a wide range of 1:480.

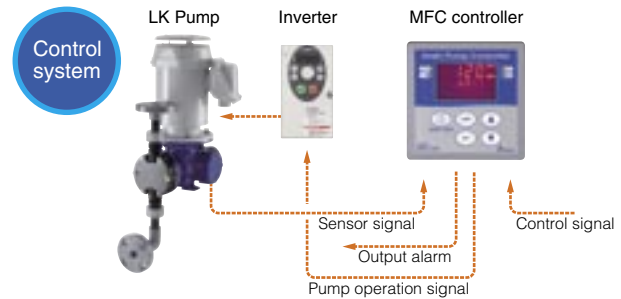

[www.iwakipumps.jp](http://www.iwakipumps.jp)

IWAKI CO.,LTD. 6-6 Kanda-Sudacho 2-chome Chiyoda-ku Tokyo 101-8558 Japan TEL : (81)3 3254 2935 FAX : 3 3252 8892

#### EUROPE / U.S.A.

European office : IWAKI Europe GmbH  
Austria : IWAKI (Austria) GmbH  
Belgium : IWAKI Belgium N.V.  
Denmark : IWAKI Nordic A/S  
Finland : IWAKI Suomi Oy  
France : IWAKI France S.A.  
Germany : IWAKI Europe GmbH  
Holland : IWAKI Holland B.V.  
Italy : IWAKI Italia S.R.L.  
Norway : IWAKI Norge AS  
Spain : IWAKI Iberica Pumps, S.A.  
Sweden : IWAKI Sverige AB  
Switzerland : IWAKI (Schweiz) AG  
U.K. : IWAKI Pumps (UK) Ltd.  
U.S.A. : IWAKI America Inc.

TEL: (49)2154 9254 0  
TEL: (41)26 674 93 00  
TEL: (32)13 67 02 00  
TEL: (45)48 24 2345  
TEL: (358)9 2745810  
TEL: (33)1 69 63 33 70  
TEL: (49)2154 9254 50  
TEL: (31)547 293 160  
TEL: (39)02 990 3931  
TEL: (47)66 81 16 60  
TEL: (34)943 630030  
TEL: (46)8 511 72900  
TEL: (41)26 674 93 00  
TEL: (44)1743 231363  
TEL: (1)508 429 1440

FAX: 2154 9254 48  
FAX: 26 674 93 02  
FAX: 13 67 20 30  
FAX: 48 24 2346  
FAX: 9 2742715  
FAX: 1 64 49 92 73  
FAX: 2154 9254 55  
FAX: 547 292 332  
FAX: 02 990 42888  
FAX: 66 81 16 61  
FAX: 943 628799  
FAX: 8 511 72922  
FAX: 26 674 93 02  
FAX: 1743 366507  
FAX: 508 429 1386

#### ASIA / OCEANIA

Australia : IWAKI Pumps Australia Pty Ltd.  
China :  
Hong Kong : IWAKI Pumps Co., Ltd.  
Shanghai : IWAKI Pumps (Shanghai) Co., Ltd.  
Guangzhou : GFTZ IWAKI Engineering & Trading Co., Ltd.  
Beijing : GFTZ IWAKI Engineering & Trading Co., Ltd. (Beijing office)  
Korea : IWAKI Korea Co., Ltd.  
Malaysia : IWAKI M Sdn. Bhd.  
Singapore : IWAKI Singapore Pte Ltd.  
Indonesia : IWAKI Singapore (Indonesia Branch)  
Taiwan : IWAKI Pumps Taiwan Co., Ltd.  
Thailand : IWAKI (Thailand) Co., Ltd.  
Vietnam : IWAKI Pumps Vietnam Co., Ltd.

TEL: (61)2 9899 2411  
TEL: (852)2607 1168  
TEL: (86)21 6272 7502  
TEL: (86)20 8435 0603  
TEL: (86)10 6442 7713  
TEL: (86)2 2630 4800  
TEL: (60)3 7803 8807  
TEL: (65)6316 2028  
TEL: (62)21 6906606  
TEL: (886)2 8227 6900  
TEL: (66)2 322 2471  
TEL: (84)613 933456

FAX: 2 9899 2421  
FAX: 2607 1000  
FAX: 21 6272 6929  
FAX: 20 8435 9181  
FAX: 10 6442 7712  
FAX: 2 2630 4801  
FAX: 3 7803 4800  
FAX: 6316 3221  
FAX: 21 6906612  
FAX: 2 8227 6818  
FAX: 2 322 2477  
FAX: 613 933399

⚠ Caution for safety use: Before use of pump, read instruction manual carefully to use the product correctly.  
Actual pumps may differ from the photos. Specifications and dimensions are subject to change without prior notice. For further details please contact us.

⚠ Legal attention related to export.

Our products and/or parts of products fall in the category of goods contained in control list of international regime for export control.  
Please be reminded that export license could be required when products are exported due to export control regulations of countries.