

Detects unusual pump operating conditions including dry-running and overload

The DRN model protects equipment (including pumps) from damage! Minimizes production downtime. Identifies possible causes of alarms so they can be investigated and addressed.



Multiple Input

Two analog, one digital, one temperature input and one current input



Logging capability

Data log feature for preventative maintenance scheduling



Easy operation

Equipped with EASY setup mode to remember the operation status and set the lower/upper limit values, as well as AUTO setup mode



Communication

RS485 external communication capability




Bar graph

Visible indication of current operating status (Refer to the figure below)




Clamp-type current sensor for ease of installation

No modification of motor leads necessary.

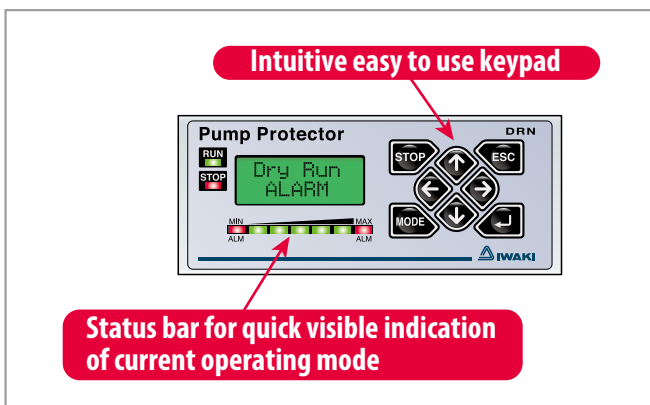

Normal operation : Green Signal
Abnormal operation : Red Signal

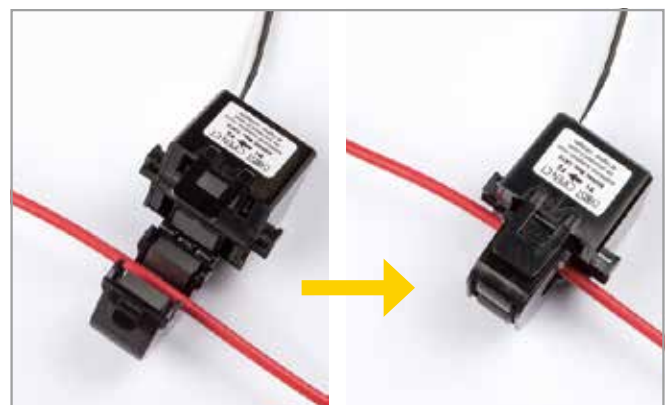


Specifications

Model	DRN-01	DRN-02
Amperometric range	0.50 - 30.00A	5.0 - 200.0A
Unit's source voltage	AC100 - 240V 50/60Hz 10VA	
Operating temperature	0 - 40°C	
Operating humidity	35 - 85%RH	
Current sensor	JS10FL	JS24FL
Analog input 1	4 - 20mA or 1 - 5V	
Analog input 2	4 - 20mA or 1 - 5V	
Temperature range	-50 - 200°C (Pt100, K thermocouple)	
Digital contact input	No voltage contact signal (also for external reset)	
Contact output	For pre-alarm : AC250V 8A (load resistance) 1c For pump-stopping : AC250V 8A (load resistance) 1a	
Logging capability	Past records (with the calendar)	
Communication	RS485 incorporated	
Supported models	MX, MXM, SMX, MDM, MDE, MDW	
Dimension in mm	D71xW108xH90	

* Not used with inverter combination.
 * Safety: UL 61010-1
 CAN/CSA-C22.2 No. 61010-1-12
 EN61010-1 EN61326-1, EN50581

Example

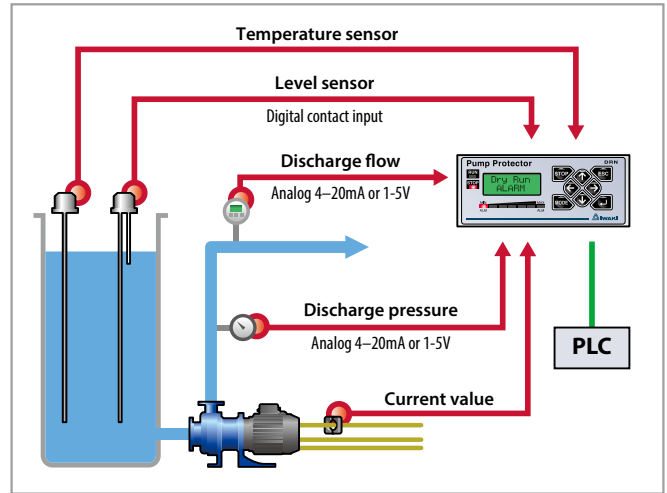

* For selection, use the rated current value of the pump-mounted motor as a standard.

Features

Item	Description
Input	1. Motor current measurement (DRN-01 : 0.50 - 30.00A, DRN-02 : 5.0 - 200.0A) 2. Discharge pressure measurement (4 - 20mA or 1 - 5V) 3. Analog measurement (4 - 20mA or 1 - 5V) 4. Temperature measurement (-50 - 200°C K-thermocouple or platinum resistance temperature detector Pt100) 5. Digital contact input (for external reset, setup change or level sensor)
Setup methods	1. EASY setup (set lower/upper limits based on the logged pump status at low/high flow rate) 2. AUTO setup (automatically set lower/upper limit based on normal pump status) 3. MANUAL setup (manually set lower/upper limit)
Bar graph display	Visual indication of current pump operation within a programmed range
Log review	The built-in calendar enables review of various items, including: 1. Time and cause of alarm (20 most recent alarms) 2. Time of maintenance (10 most recent operations) 3. Cumulative operating time of a pump and a DRN device 4. Cumulative number of times MC relay and ALM relay are activated 5. Setting 6. Model
Pre-alarm	When measured value exceeds the pre-alarm set value, a pre-alarm is issued before stopping the pump.
Pump-stopping output	When measured value is out of the lower/upper limit range, the pump shut off relay is activated.
Current offset	Offsets the measured current value.
Scaling	Changes the measurement range and unit.
Temperature offset	Offsets the measured temperature.
Maintenance time notice	Displays a notification that the device should be maintained.
Dual detection	Monitors motor current and discharge pressure. When an alarm is activated for either, displays the assumed cause. (Low Flow, Over Load, Dry Run, High Flow)
Automatic cavitation detection	Automatically detects cavitation and issues a warning.
Communication	RS485 communication
Other Features	Keypad lock, Initialization.

IWAKI CO., LTD. 6-6 Kanda-Sudacho 2-chome Chiyoda-ku Tokyo 101-8558 Japan TEL : (81)3 3254 2935 FAX : 3 3252 8892 Please find your distributor location at www.iwakipumps.jp

European Headquarter : IWAKI Europe GmbH	TEL: (49)2154 9254 0	FAX: 2154 9254 48	U.S.A. : IWAKI America Inc.	TEL: (1)508 429 1440	FAX: 508 429 1386
Germany : IWAKI Europe GmbH	TEL: (49)2154 9254 50	FAX: 2154 9254 55	Argentina : IWAKI America Inc. (Argentina Branch)	TEL: (54)11 4745 4116	
The Netherlands : IWAKI Europe GmbH (Netherlands Branch)	TEL: (31)74 2420011	FAX: (49)2154 925448	Brazil : IWAKI Do Brazil Comercio De Bombas Hidraulicas LTDA.	TEL: (55)19 3244 5900	FAX: 19 3244 5900
Italy : IWAKI Europe GmbH (Italy Branch)	TEL: (39)0444 3711 115	FAX: 0444 335350	Indonesia : IWAKI Singapore Pte Ltd.	TEL: (65)6316 2028	FAX: 6316 3221
Spain : IWAKI Europe GmbH (Spain Branch)	TEL: (34)93 37 70 198	FAX: 93 47 40 991	Malaysia : IWAKI Singapore (Indonesia Office)	TEL: (61)2 9899 2411	FAX: 21 6906612
Poland : IWAKI Europe GmbH (East Europe Branch)	TEL: (48)12 347 0755	FAX: 13 67 20 30	Australia : IWAKI Sdn. Bhd.	TEL: (60)3 7803 8807	FAX: 3 7803 4800
Belgium : IWAKI Belgium N.V.	TEL: (32)13 67 02 00	FAX: 12 347 0900	Australia : IWAKI Pumps Australia Pty Ltd.	TEL: (86)20 84350603	FAX: 20 84359181
Denmark : IWAKI Nordic A/S	TEL: (45)48 24 2345		China (Hong Kong) : IWAKI Pumps Co., Ltd.	TEL: (852)2607 1168	FAX: 2607 1000
Finland : IWAKI Suomi Oy	TEL: (358)9 2745810		China (Guangzhou) : GFTZ IWAKI Engineering & Trading Co., Ltd.	TEL: (86)21 6272 7502	FAX: 21 6272 6929
France : IWAKI France S.A.	TEL: (33)1 69 63 33 70	FAX: 1 64 49 92 73	China (Shanghai) : IWAKI Pumps (Shanghai) Co., Ltd.	TEL: (82)2 6238 4800	FAX: 2 6238 4801
Norway : IWAKI Norge AS	TEL: (47)23 38 49 00		Korea : IWAKI Korea Co., Ltd.	TEL: (886)2 8227 6900	FAX: 2 8227 6818
Sweden : IWAKI Sverige AB	TEL: (46)8 511 72900	()Country codes	Taiwan : IWAKI Pumps Taiwan Co., Ltd.	TEL: (66)2 322 2471	FAX: 2 322 2477

Caution for safety use: Before use of pump, read instruction manual carefully to use the product correctly. Actual pumps may differ from the photos. Specifications and dimensions are subject to change without prior notice. For further details please contact us.

Legal attention related to export. Our products and/or parts of products fall in the category of goods contained in control list of international regime for export control. Please be reminded that export license could be required when products are exported due to export control regulations of countries. The posting and copying from this catalogue without permission is not accepted firmly.